

WARNING: READ THE ASSEMBLING INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING THE DOUBLE PLANK BACK REST SPECTATOR SEATING.




Make sure to wear protective gloves and foot protection when installing and assembling this product. Unpack the unit and make sure all the components are included before proceeding. This activity requires two or more people as lifting is involved. Please ensure bolts are only finger tightened during the assembling process for flexibility in lining up components. Securely tighten the bolts before anchoring the product to the ground.




DOUBLE PLANK BACK REST SPECTATOR SEATING

PRODUCT CODE (3TGS2)

PART No.	PART NAME	QTY
3TGS1	MAIN FRAME	3
3TGS2	BACK REST FLAT BAR	1
3TGS3	3000 mm.-BACK REST PLANK	1
3TGS4	3000mm.-SEATING PLANK	6
3TGS5	M10x35mm. CUP HEAD BOLT	3
3TGS6	M6x25 mm. HEX. HEAD BOLT	78
3TGS7	M6 LOCKNUT	78
3TGS8	M10 LOCKNUT	3
3TGS9	M10 PLAIN WASHER	3

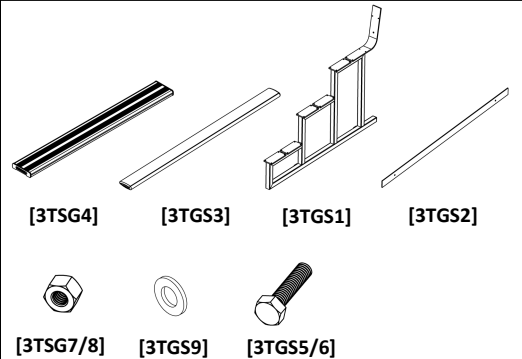


1

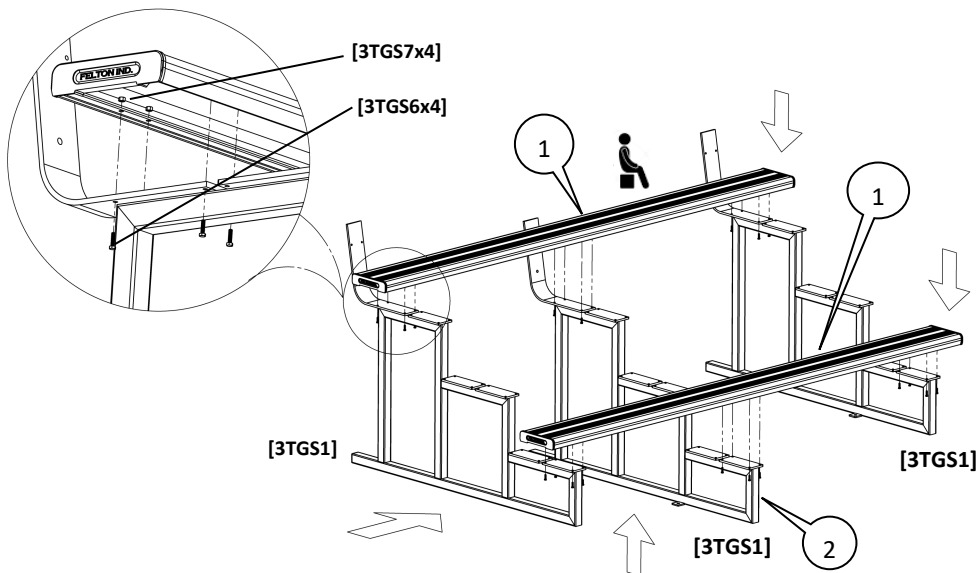

- A. Place two frames [3TGS1] with lugs facing inwards and secure them to the back and front seating planks [3TGS4], by using hexagonal head bolts [3TGS6] and locknuts [3TGS7] - finger tighten. **(STEP1).**
- B. Locate the central frame in place and secure it to the seating planks [3TGS4], with hexagonal head bolts [3TGS6] and locknuts [3TGS7] - finger tighten **(STEP2).**



2

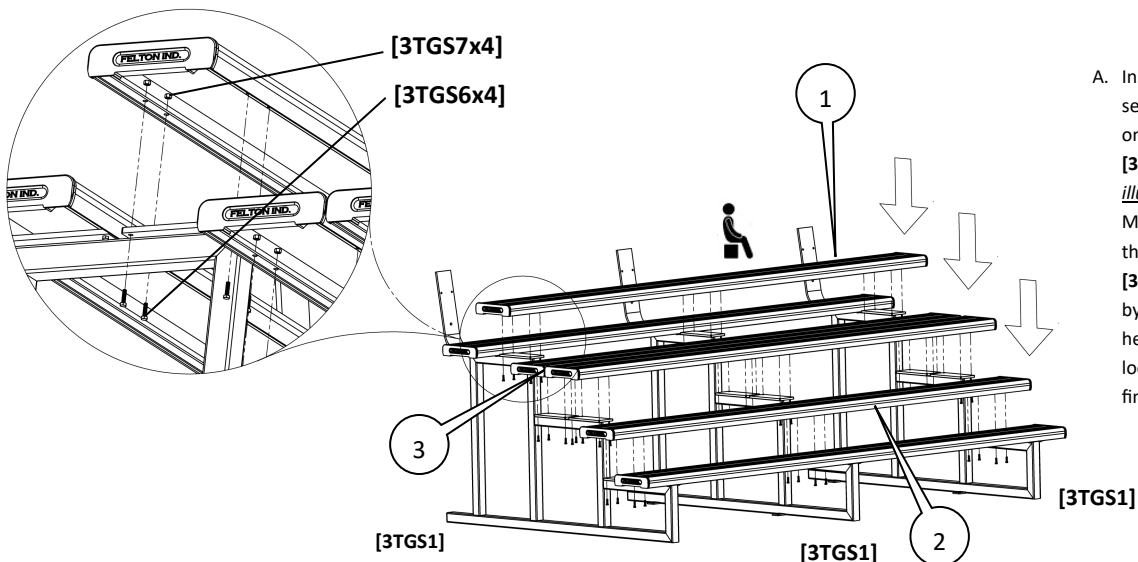

- A. Install the rest of the seating planks [3TGS4] on to the frames [3TGS1], following the *illustration's sequence*. Make sure to secure the seating planks [3TGS4] to the frames, by using hexagonal head bolts [3TGS6] and locknuts [3TGS7] - finger tighten.



1


WARNING: READ THE ASSEMBLING INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING THE DOUBLE PLANK BACK REST SPECTATOR SEATING.



Make sure to wear protective gloves and foot protection when installing and assembling this product. Unpack the unit and make sure all the components are included before proceeding. This activity requires two or more people as lifting is involved. Please ensure bolts are only finger tightened during the assembling process for flexibility in lining up components. Securely tighten the bolts before anchoring the product to the ground.




3

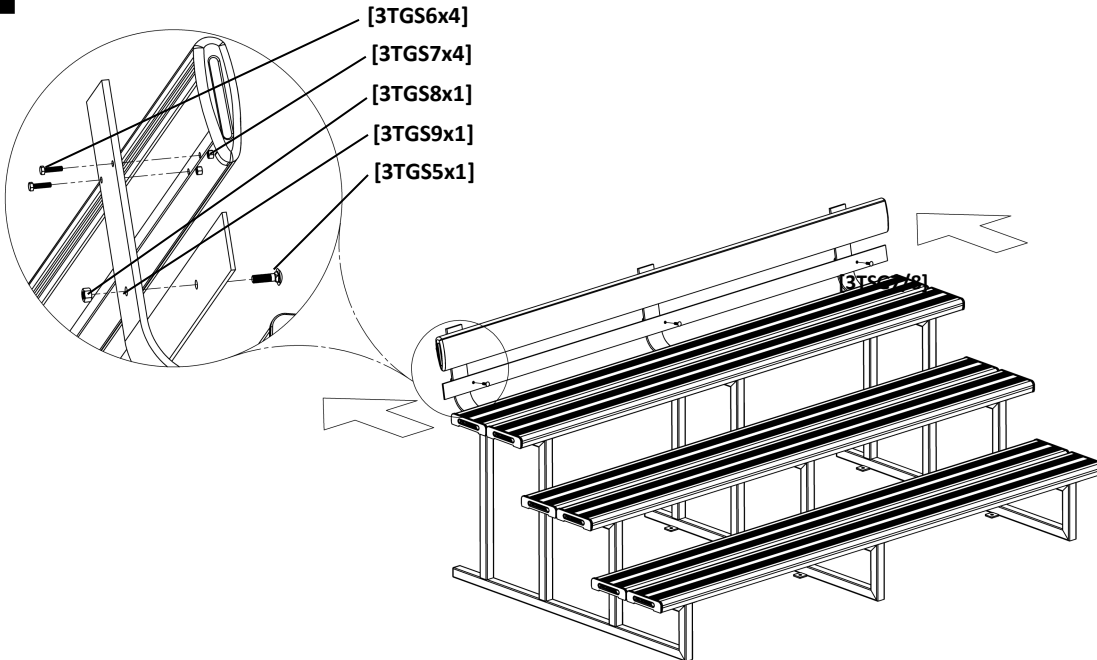

- A. Have the back rest flat bar [3TGS2] in place and secure it to the frame back rest plates [3TGS1], by using cup head bolts [3TGS5] and locknuts [3TGS8] - finger tighten.
- B. Install the back rest plank [3TGS3] on to the frames as shown and secure them by using hexagonal head bolts [3TGS6] and locknuts [3TGS7]. - finger tighten.

4

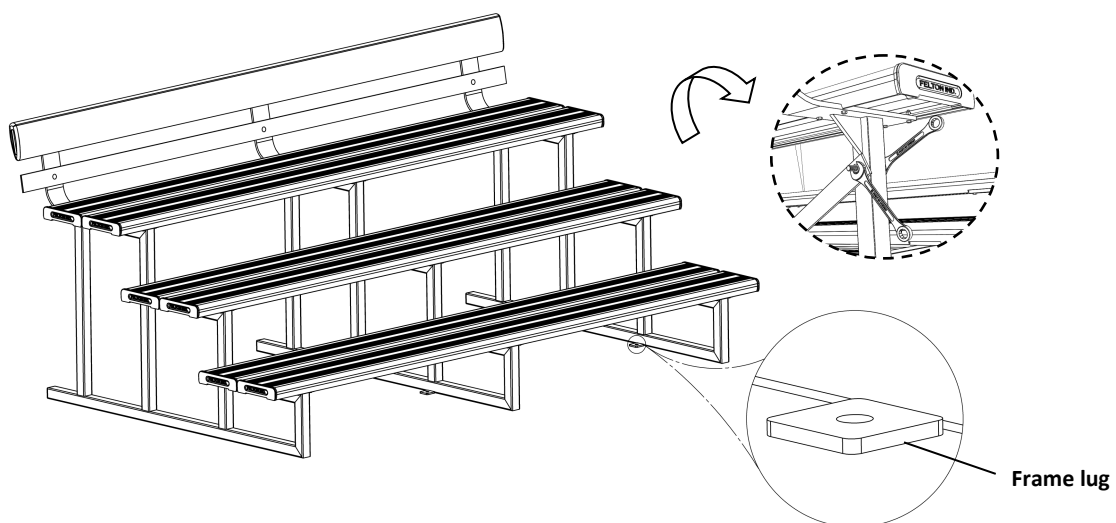

- A. Tight the whole fasteners with a spanner and/or an appropriate tool. Adjust the whole unit as necessary.
- B. Fix the spectator seating to the ground, by installing dyna-bolts onto each frame lug.

2