# ASSEMBLY INSTRUCTIONS

felton INDUSTRIES



## THANK YOU

for choosing Felton Industries.

SORRENTO TABLE
ABOVE GROUND


Felton Industries Pty Ltd | ABN: 17 130 687 240

felton.net.au sales@felton.net.au

1800 834 016


WARNING: This Assembly requires two or more people as lifting is involved. Please ensure bolts and nuts are only finger - tightened throughout assembly for flexibility in lining up components. Bolt and nuts should be securely tightened in place when instructed to do so. Please check all components are included before proceeding with the assembly.


| NO. | NAME | QTY. |
|---|---|---|
| 1 | SORRENTO TABLE LEG SUPPORT-AG | 2 |
| 2 | AVOCA TABLE 2.0_HORIZONTAL SUPPORT | 1 |
| 3 | AS 1112 Bolt - 0.375 x 3 | 4 |
| 4 | AS-FLAT WASHER - 0.375 | 31 |
| 5 | AS 1112 Nut - 0.375 | 31 |
| 6 | Square Alu Batten L2020 | 9 |
| 7 | AS 1112 Cup Head Bolt - 0.375 x L 2inch | 27 |
| 8 | SORRENTO TABLE MIDDLE SUPPORT PLATE | 1 |

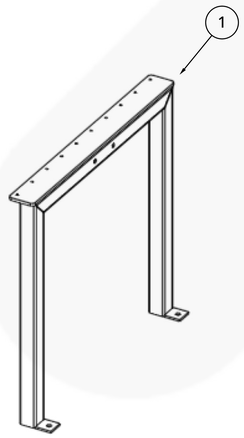















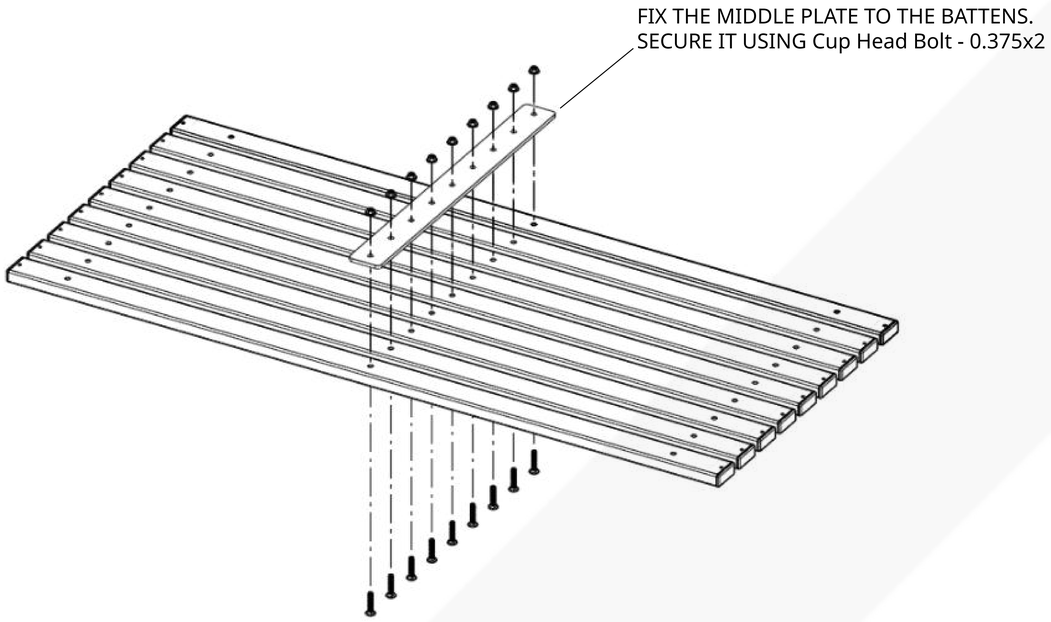





WARNING: This Assembly requires two or more people as lifting is involved. Please ensure bolts and nuts are only finger - tightened throughout assembly for flexibility in lining up components. Bolt and nuts should be securely tightened in place when instructed to do so. Please check all components are included before proceeding with the assembly.

1.





Attach the ten square alu battens ❻ to the middle plate support ❽ by using bolts ❼, washers ❹ and nuts ❺ as illustrated.


2.

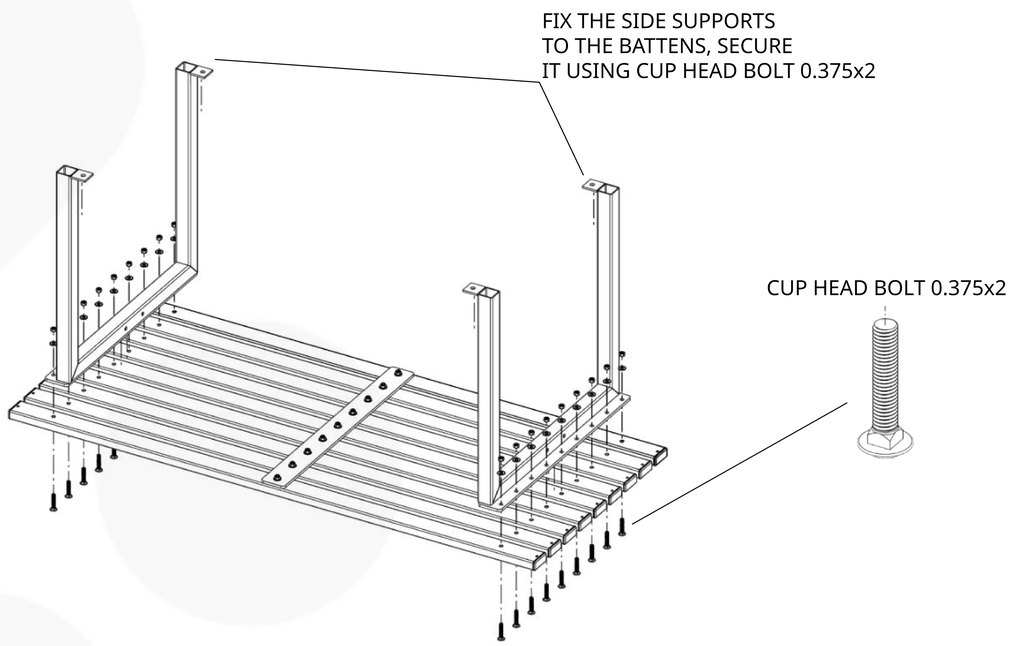


Attach the leg supports ❶ to one of each end of the battens using bolts ❼, washers ❹ and nuts ❺. Make sure the leg support feet are facing inwards, and the mounting plate holes are facing outwards.

3.

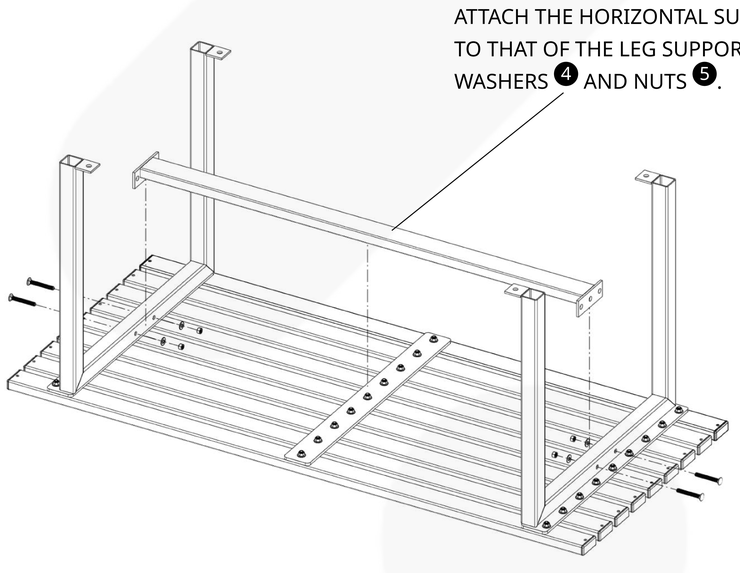

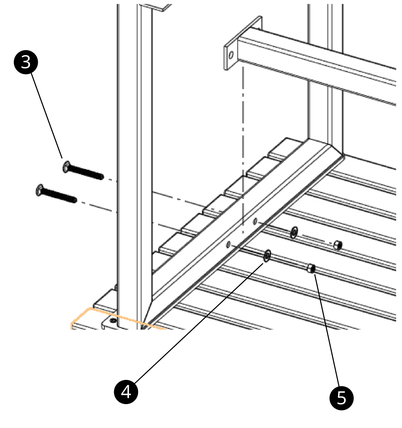
Place the horizontal support ❷ between the two leg supports ❶, making sure that all holes are properly aligned.
Secure all parts using the specified bolts, washers and nuts. Once everything is assembled, double-check that all components are correctly positioned, then fully tighten all bolts and screws.
Finally, bolt the table to the floor or surface using the leg feet or mounting plates.